



CONECTORI

marimile 15, 22 si 30

CARACTERISTICI	Standard	marime 15 DIN 43650, 9,4 mm industrie standard B	marime 22 DIN 43650, 11 mm industrie standard B	marime 30 ISO 4400 EN 175301-803, forma A
	Numar contacte	2 + inpamantare		
	Spatiu intre 2 contacte	9,4 mm	11 mm	18 mm
	Clasa de protectie	IP65		
	Conectare cablu	prin suruburi		
	Diametru max. conductori	0,6 mm ²	1,5 mm ²	
	Carcasa standard	fibra sticla-poliamida (PA + FV)		
	Carcasa cu LED	poliamida transparenta (PA)		
	Diametru cablu	4 ... 6 mm	6 ... 8 mm	6 ... 10 mm
	Versiune cu LED	-	6 ... 8 mm	8 ... 10 mm


- Pentru utilizare internalexterna
- Clasa de protectie IP 65
- Protectie electrica si indicator vizual
- Conectare usoara a cablului electric

ALEGERE PRODUS

tensiune DC (=) / AC (~) V	cod		
	marimea 15 9,4 mm	marimea22	marimea 30
Conector standard	88143581	88122404	88122602
Conector cu cablu 2 metri	88143567	88122413	88122612
Conector cu indicator vizual si protectie electrica			
24 V DC/AC	88143580 (1)	88122405	88122603
48 V DC/AC	-	88122406	88122604
115 V DC/AC	-	88122407	88122605
230 V DC/AC	-	88122410	88122608

(1) : + 2 m cable

DIMENSIUNI

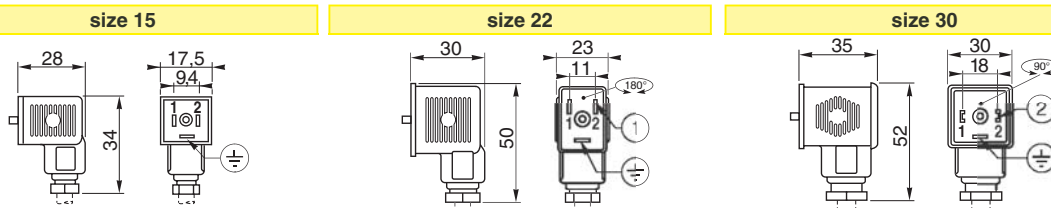

OPTIUNI SI ACCESORII

Conector, marimea 15
ISO 15217 / DIN 43650,
8 mm, forma C

Set cu 10 conectori,
marimea 22
cod: **88122421**

Set cu 10 conectori,
marimea 30
cod: **88122636**