

Digital Temperature Transmitters Model T12.30, Universally Programmable, Rail Mounting

WIKA Data Sheet TE 12.02




Applications

- Machinery, plant construction
- Process industry

Special Features

- Universal configuration via Windows-PC, simulation of the sensor not necessary
- Isolation voltage 1500 VAC between sensor and current loop
- Signalling configurable for sensor burnout and sensor short circuiting

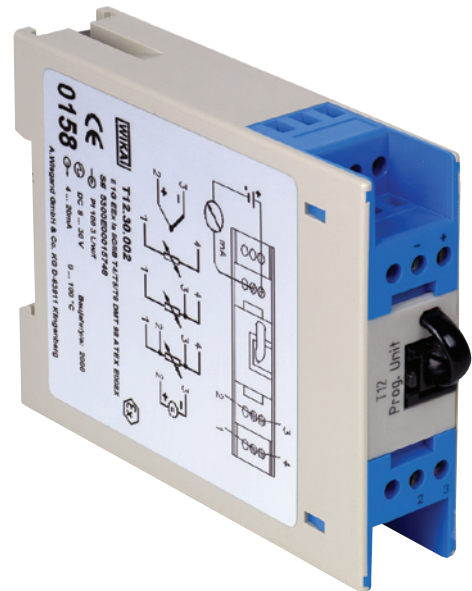

Digital Temperature Transmitter Model T12.30

Description

These temperature transmitters are designed for universal industrial use. They are characterised by a high accuracy, galvanic isolation and EMI protection.

In addition to a wide variety of standard sensor types (e.g. sensors to DIN EN 60 751, JIS C1606, DIN 43760, DIN EN 60 584 or DIN 43 710), custom sensors can also be configured by entering the relevant value pairs.

The sensor connection arrangement is configurable, thus ensuring optimal lead wire compensation. Cold junction compensation for thermocouples is built-in, while external cold junction compensation can also be selected.

The configurable error signalling (e.g. sensor burnout, hardware errors, sensor over/under-range) ensures a high degree of monitoring flexibility.

Configuration changes can be quickly and easily transmitted to the T12 using the WIKa_T12 configuration software (free download at www.wika.de) and the communication interface (programming unit), which is available as an accessory. Its two-way communication enables the measured values to be displayed on a PC/notebook.

The programming unit provides voltage to the T12 transmitter, so that no additional supply is required to configure the T12.

The rail mounting transmitters are suitable for all standard rails in accordance with DIN EN 50 022-35.

These transmitters are delivered either with a standard configuration or to customers' specification within the configuration limits possible.

Specifications

Model T12.30

Input	Type of sensor	Measuring range	Standard	Minimum measuring span ¹⁾
configurable				
RTDs	Pt100 ($\alpha = 0,00385$)	-200 °C ... +850 °C	DIN EN 60 751	25 K
	JPt100 ($\alpha = 0,003916$)	-200 °C ... +500 °C	JIS C 1606 (1989)	25 K
	Ni100	-60 °C ... +250 °C	DIN 43 760 (1987-09)	25 K
Thermocouples	type T, Cu-CuNi	-200 °C ... +400 °C	DIN EN 60 584	50 K
	type E, NiCr-CuNi	-100 °C ... +1000 °C	DIN EN 60 584	50 K
	type J, Fe-CuNi	-100 °C ... +1200 °C	DIN EN 60 584	50 K
	type L, Fe-CuNi	-100 °C ... +900 °C	DIN 43 710 (1985-12)	50 K
	type K, NiCr-Ni	-180 °C ... +1372 °C	DIN EN 60 584	50 K
	type N, NiCrSi-NiSi	-180 °C ... +1300 °C	DIN EN 60 584	100 K
	type U, Cu-CuNi	-200 °C ... +600 °C	DIN 43 710 (1985-12)	75 K
	type R, PtRh-Pt	-50 °C ... +1760 °C	DIN EN 60 584	200 K
	type S, PtRh-Pt	-50 °C ... +1760 °C	DIN EN 60 584	200 K
	type B, PtRh-PtR	0 °C ... +1820 °C ²⁾	DIN EN 60 584	200 K
	type W3, W3Re/W25Re	0 °C ... +2300 °C	ASTM E988	200 K
	type W5, W5Re/W26Re	0 °C ... +2300 °C	ASTM E988	200 K
Resistance sensor		0 ... 5000 Ω		30 Ω
mV - sensor		-10 ... +800 mV		5 mV
RTDs / resistance sensor				
Measuring deviation per DIN EN 60 770, 23 °C \pm 5 K				
	RTDs	\pm 0.2 K or ³⁾ \pm (0.025 % FS + 0.1) K		
	Resistance sensor	\pm 0.07 Ω or ³⁾ \pm 0.03 % FS in Ω		
Sensor current		approx. 0.2 mA		
Temperature coefficient T_C	RTDs	\pm (0.025 % FS + 0.09) K / 10 K T_{amb}		
	Resistance sensor	\pm (0.025 % FS + 0.01) Ω / 10 K T_{amb}		
Lead wire connection		configurable: 2 wire, 3 wire, 4 wire		
Connection leads	Effect	\pm 0.02 Ω / 10 Ω		
	max. permissible resistance	30 Ω , 3 wire symmetric		
Signalling of sensor error		configurable		
Thermocouples				
Measuring deviation ⁴⁾ per DIN EN 60 770, 23 °C \pm 5 K				
	Cold junction compensation	\pm 1.0 K		
Temperature coefficient T_C	type T, E, J, L, K, N, U	\pm (0.05 % FS + 0.1) K / 10 K T_U or ³⁾ \pm 0.5 K / 10 K T_{amb}		
	type R, S, B, W3, W5	\pm 2 K / 10 K T_{amb}		
Connection leads	Effect	\pm 0.5 μ V / 10 Ω		
	max. permissible resistance	250 Ω		
Signalling of sensor error		configurable		
mV - sensor				
Measuring deviation per DIN EN 60 770, 23 °C \pm 5 K				
Temperature coefficient T_C		\pm (0.05 % EW + 0.02) mV / 10 K T_{amb}		
Connection leads	Effect	\pm 0.5 μ V / 10 Ω		
	max. permissible resistance	250 Ω		
Analogue output for measuring range				
configurable: 4 ... 20 mA or 20 ... 4 mA, 2 wire design				
with type of sensor RTDs	linear to temperature per DIN EN 60 751 / JIS C 1606 / DIN 43 760 : 1987-09			
with type of sensor thermocouples	linear to temperature per DIN EN 60 584 / DIN 43 710 : 1985-12 / ASTM E988			
by simulation mode	independent from input signal, simulation value configurable from 3.5 mA up to 23 mA			
Output limits configurable				
	Application specification	configurable from 3.6 mA up to 23 mA		
	NAMUR NE 43	lower limit: 3.8 mA upper limit: 20.5 mA		
	not active	lower limit: 3.6 mA upper limit: 23 mA		
Load R_A	$R_A \leq (U_B - 9V) / 0.023$ A with R_A in Ω and U_B in V			
Load effect	\pm 0.01 % of measuring span / 100 Ω			
Measuring deviation per DIN IEC 770, 23 °C \pm 5 K	\pm 0.05 % of measuring span			
Temperature coefficient T_C	\pm 0.1 % of measuring span / 10 K T_{amb}			
Damping	configurable: minimum 0.5 s, 1 s up to 60 s			
Measured value update	approx. 2 / s			
Power supply effect	\pm 0.005 % of measuring span / V			
Total measuring deviation				
sum of input + output per DIN EN 60 770, 23 °C \pm 5 K				
Signalling at analogue output				
with sensor error and internal malfunction				
NAMUR NE 43	up scale	< 3.6 mA		
	down scale	> 21.0 mA		
Substitute value	configurable from 3.5 mA up to 23.0 mA			

- 1) Lower limit of range maximum 50 % of upper limit of range
- 2) Technical data valid only for configured measuring range \geq 400 °C
- 3) Whichever is greater
- 4) Valid only for configured lower limit of range \geq -150 °C

- FS Full scale value of configured measuring range
 R_A Load
 T_C Temperature coefficient
 T_{amb} Ambient temperature
 U_B Loop power supply voltage, see power supply


Specifications, continued
Model T12.30

Power supply U_B	
Model T12.30.000 (without Ex-protection)	DC 9 ... 36 V
Model T12.30.002 (with Ex, intrinsically safe ia)	DC 9 ... 30 V
Model T12.30.006 (with Ex-protection per CSA)	DC 9 ... 30 V
Model T12.30.008 (with Ex-protection per FM)	DC 9 ... 30 V
Model T12.30.009 (with Ex, energy limited and non sparking)	DC 9 ... 36 V
Input power supply protection	reverse polarity
Ex-protection per Directive 94/9/EC ATEX	EC-Type Examination Certificate DMT 98 ATEX E 008 X
Intrinsic Safety per EN 50 020	
Model T12.30.002	II 1G EEx ia IIB / IIC T4 / T5 / T6
Permissible ambient temperature	-20 °C ... +70 °C with T4
	-20 °C ... +70 °C with T5
	-20 °C ... +60 °C with T6
Safety-related max. values for the current loop circuit (connections + und -)	U _i = DC 30 V I _i = 100 mA P _i = 705 mW C _i = 25 nF L _i = 0.65 mH
Safety-related max. values for the sensor circuit (connections 1 up to 4)	U _O = DC 11,5 V I _O = 31 mA P _O = 87 mW Group II B: C _O = 11 µF L _O = 8.6 mH Group II C: C _O = 1.5 µF L _O = 8.6 mH
Ex-protection, Intrinsic Safety per CSA	CSA File No. LR 105000-7
Model T12.30.006	Class I, Division 1, Groups A, B, C and D
Permissible ambient temperature	max. +70 °C with T4
	max. +70 °C with T5
	max. +60 °C with T6
Safety-related max. values for the current loop circuit (connections + und -)	V _{max} = DC 30 V I _{max} = 100 mA P _{max} = 705 mW C _i = 25 nF L _i = 0.65 mH
Safety-related max. values for the sensor circuit (connections 1 up to 4)	V _{OC} = DC 11,5 V I _{SC} = 31 mA P _{max} = 87 mW C _a = 0.4 µF L _a = 8.65 mH
Ex-protection, Intrinsic Safety per FM	Installation Drawing No. 3184731
Model T12.30.008	Class I, Division 1, Groups A, B, C and D
Permissible ambient temperature	-20 °C ... +70 °C with T4
	-20 °C ... +70 °C with T5
	-20 °C ... +60 °C with T6
Safety-related max. values for the current loop circuit (connections + und -)	V _{max} = DC 30 V I _{max} = 100 mA P _{max} = 705 mW C _i = 25 nF L _i = 0.65 mH
Safety-related max. values for the sensor circuit (connections 1 up to 4)	V _{OC} = DC 11.5 V I _{SC} = 31 mA P _{max} = 87 mW C _a = 1.5 µF L _a = 8.6 mH
Ex-protection per Directive 94/9/EC energy-limited or non sparking equipment per EN 50 021	EC-Type Examination Certificate DMT 99 E 088 X
Model T12.30.xx9	II 3G EEx nL/nA IIC T4 / T5 / T6
Permissible ambient temperature	-20 °C ... +70 °C with T4
	-20 °C ... +70 °C with T5
	-20 °C ... +60 °C with T6
Safety-related max. values for the current loop circuit (connections + und -)	U _i = DC 36 V C _i = 25 nF L _i = 650 µH
Safety-related max. values for the sensor circuit (connections 1 up to 3)	U _O = DC 5 V I _O = 0.25 mA C _O = 1000 µF L _O = 1000 mH
Electromagnetic compatibility (EMC)	per EMC Directive 89/336/EWG DIN EN 61 326:2002
Ambient conditions	
Ambient and storage temperature	Standard range: -20 ... +70 °C
Climate class	Bx (-20 ... +70 °C, 5 % up to 95 % relative humidity) DIN EN 60 654-1
Maximum permissible humidity	90 % relative humidity DIN EN 60 068-2-30 Var. 2
Vibration	10 ... 2000 Hz 5 g DIN EN 60 068-2-6
Shock	DIN IEC 68-2-27 g _N = 30
Salt fog	DIN IEC 68-2-11

Special features		
Isolation voltage (input versus analogue output)		1500 VAC, 60 s
Configuration and calibration data		permanently stored in EEPROM
Testing current to monitor sensor		nom. 33 μ A during testing cycle, otherwise 0 μ A
Self-monitoring		automatic execution of initial test after connection to power supply, thereafter monitoring for internal malfunction
Warm-up time		approx. 5 Min. ¹⁾
Power consumption with U_B 24 V		max. 552 mW
Communication interface		Programming Unit PU348 (see accessories)
Case		rail mounting case for standard rail per DIN EN 50 022-35
Material		plastic
Ingress protection	case	IP 56 IEC 529 / EN 60 529
	terminal connections	IP 20 IEC 529 / EN 60 529
Cross section of terminal connections		max. 2,5 mm ²
Weight		approx. 200 g
Dimensions		see dimensions


1) Time, after turn on, until the instrument will function within specified repeatability.

Dimensions in mm

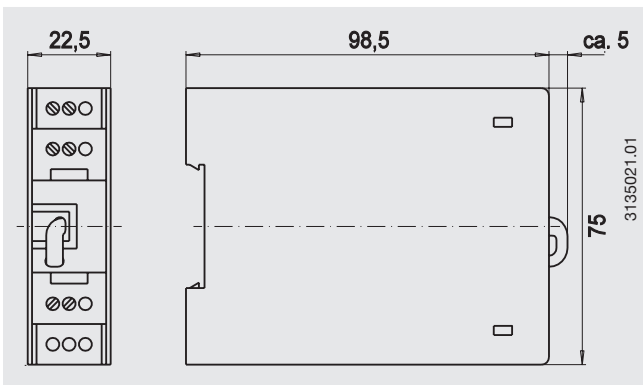


Load diagram


The permissible load is dependent upon the loop power supply voltage.

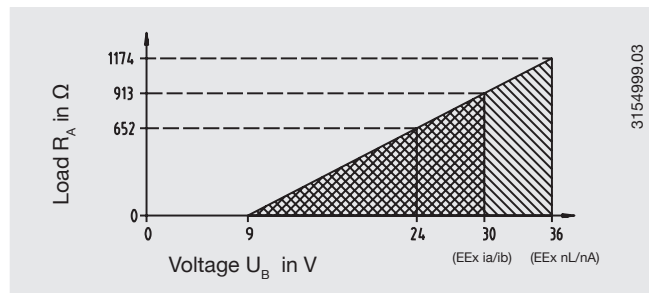

Designation of terminal connectors

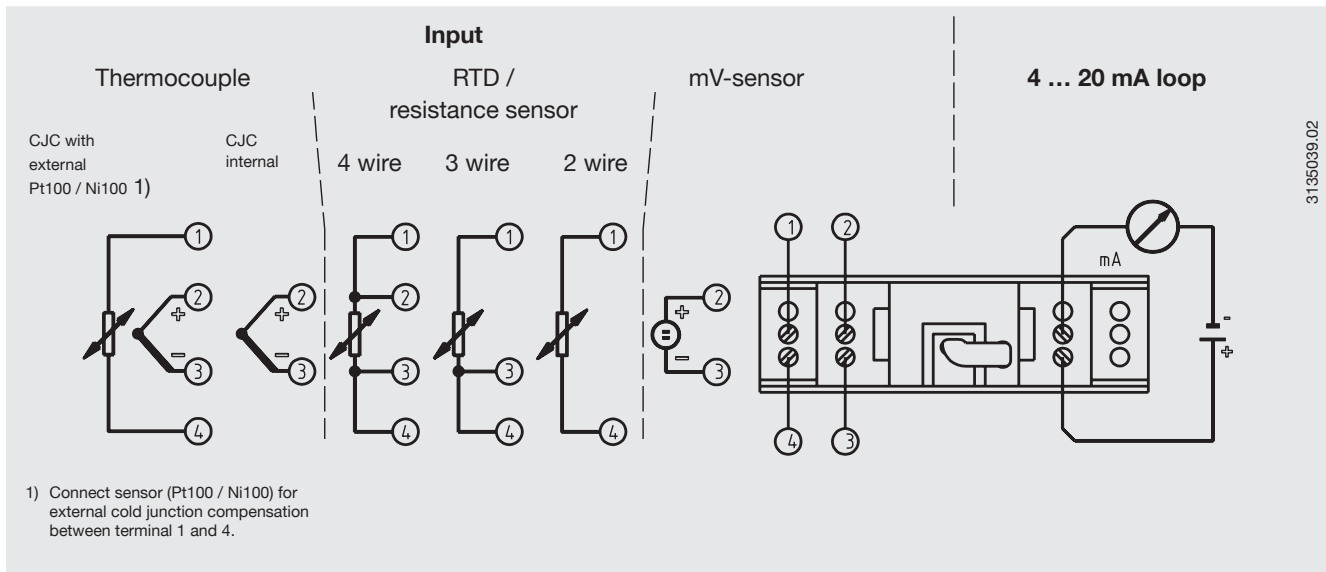


Connection of Programming Unit PU348

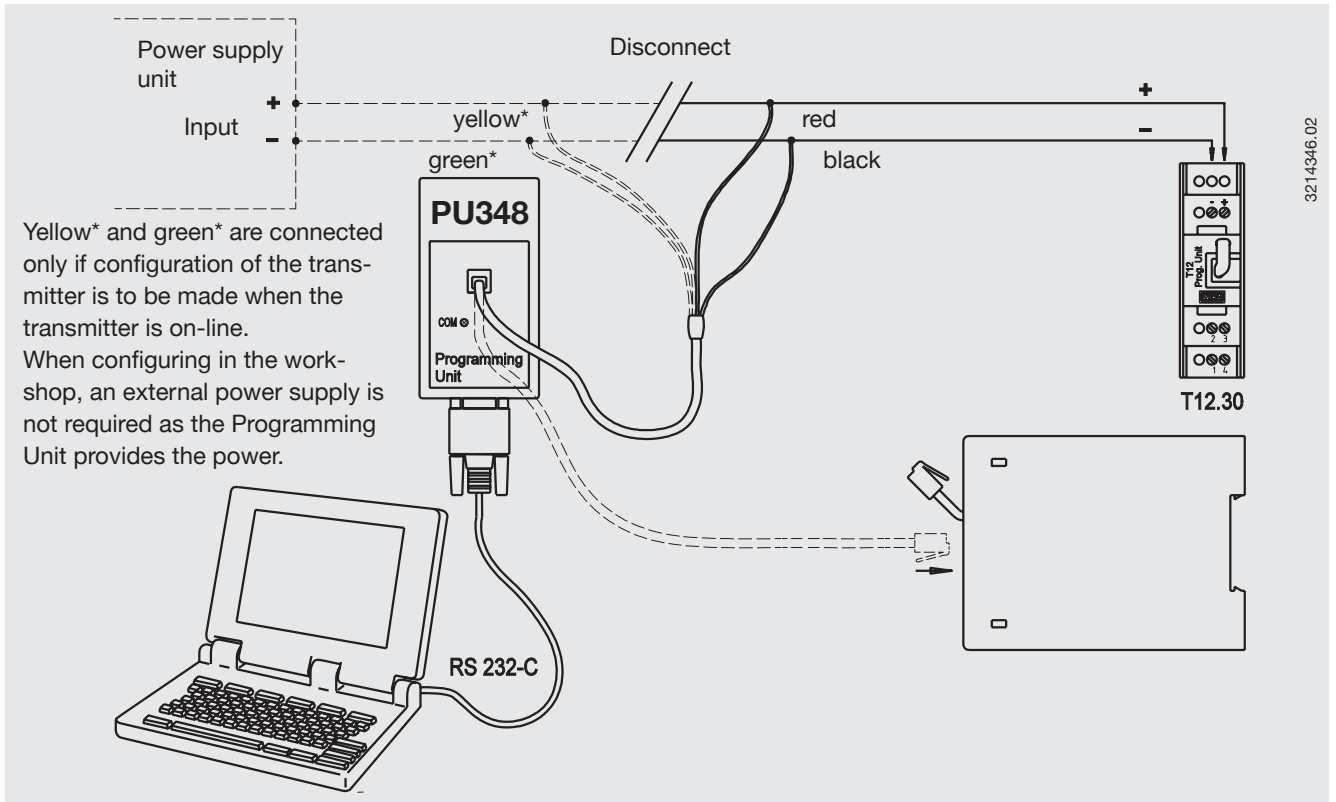

Accessories

Configuration-Set

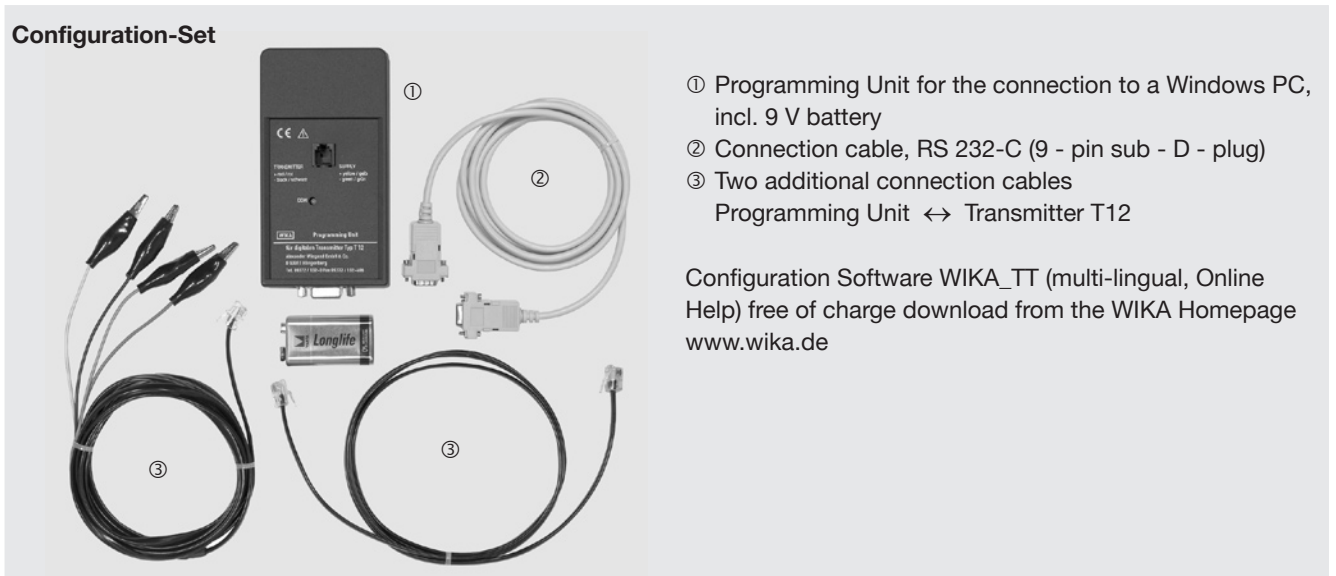

Ordering information

Field No.	Code	Features
Model		
1	<input type="text"/>	T12.30 T12.30, rail mounting
Explosion protection		
	<input type="text"/>	0 without
	<input type="text"/>	2 II 1G EEx ia IIC T4/T5/T6 acc. to directive 94/9/EC (ATEX)
	<input type="text"/>	6 CSA Class I, Division 1, Group A, B, C and D
	<input type="text"/>	8 FM Class I, Division 1, Group A, B, C and D
2	<input type="text"/>	9 II 3G EEx nL/nA IIC T4/T5/T6 acc. to directive 94/9/EC
Configuration		
	<input type="text"/>	GK basic configuration ¹⁾
3	<input type="text"/>	KK customer's specification ²⁾ <i>please state as additional text</i>
Admissible ambient temperature		
4	<input type="text"/>	R standard -20 °C ... +70 °C
Additional order info		
	<input type="text"/>	YES NO
5	<input type="text"/>	T Z additional text <i>Please state as clearly understandable text!</i>

Order code:

1	2	3	4	5
T12.30	- 00	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>


Additional text:

Accessories (please order separately) Order No.

Configuration Set for T12 and T24 ³⁾	36 34842
---	----------

- 1) Input signal: Pt100 in 3 wire connection, Measuring range: 0 ... 150 °C, Output signal: 4 ... 20 mA, Output limits: NAMUR (lower limit: 3.8 mA upper limit: 20.5 mA), Signalling of sensor error: NAMUR down scale (3.5 mA), Damping: off
- 2) Please pay attention to the limits of measuring ranges on page 2.
- 3) Configuration software free of charge download from the WIKA Homepage www.wika.de

Screenshot Configuration Software ³⁾

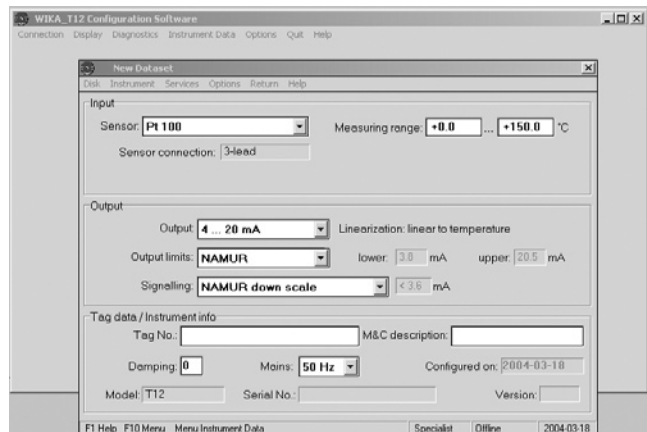

Änderungen und den Austausch von Werkstoffen behalten wir uns vor.
Die beschriebenen Geräte entsprechen in ihren Konstruktionen, Maßen und Werkstoffen dem derzeitigen Stand der Technik.



WIKI Alexander Wiegand GmbH & Co. KG
 Alexander-Wiegand-Straße 30
 63911 Klingenberg/Germany
 Tel. (+49) 9372/132-0
 Fax (+49) 9372/132-406
 E-mail info@wika.de
www.wika.de